


TWO (2) REQUIRED TO CAP AN ARCH

FOUR (4) COMMUNICATION OPENINGS ON SIDE ADJACENT TO ARCH

1. ACCESS OPENING(S) ARE TO BE LOCATED IN THE TOP OF MANIFOLD(S). OPENINGS MAY BE 24" DIA. FRAME/COVER AND/OR 24" x 45" FRAME/GRATE.
2. MANIFOLDS MAY BE UTILIZED AT BOTH ENDS OF A ROW OF ARCHES IN LIEU OF CAPPING SLABS AT ONE END.
3. MANIFOLDS THAT ARE PLACED END-TO-END REQUIRE COMMUNICATION OPENINGS IN THE END OF ADJACENT MANIFOLDS.
4. MANIFOLDS MAY BE PLACED BETWEEN ROWS OF ARCHES. COMMUNICATION OPENINGS ARE THEN REQUIRED IN BOTH LONG WALLS OF THE MANIFOLD.
5. INFLUENT/EFFLUENT PIPES MAY BE LOCATED IN THE MANIFOLD WALLS AND CAPPING SLABS. INFLUENT PIPE OPENINGS NOT GREATER THAN 8" IN DIAMETER MAY BE PLACED IN THE LOWER PORTION OF ARCH WALL.

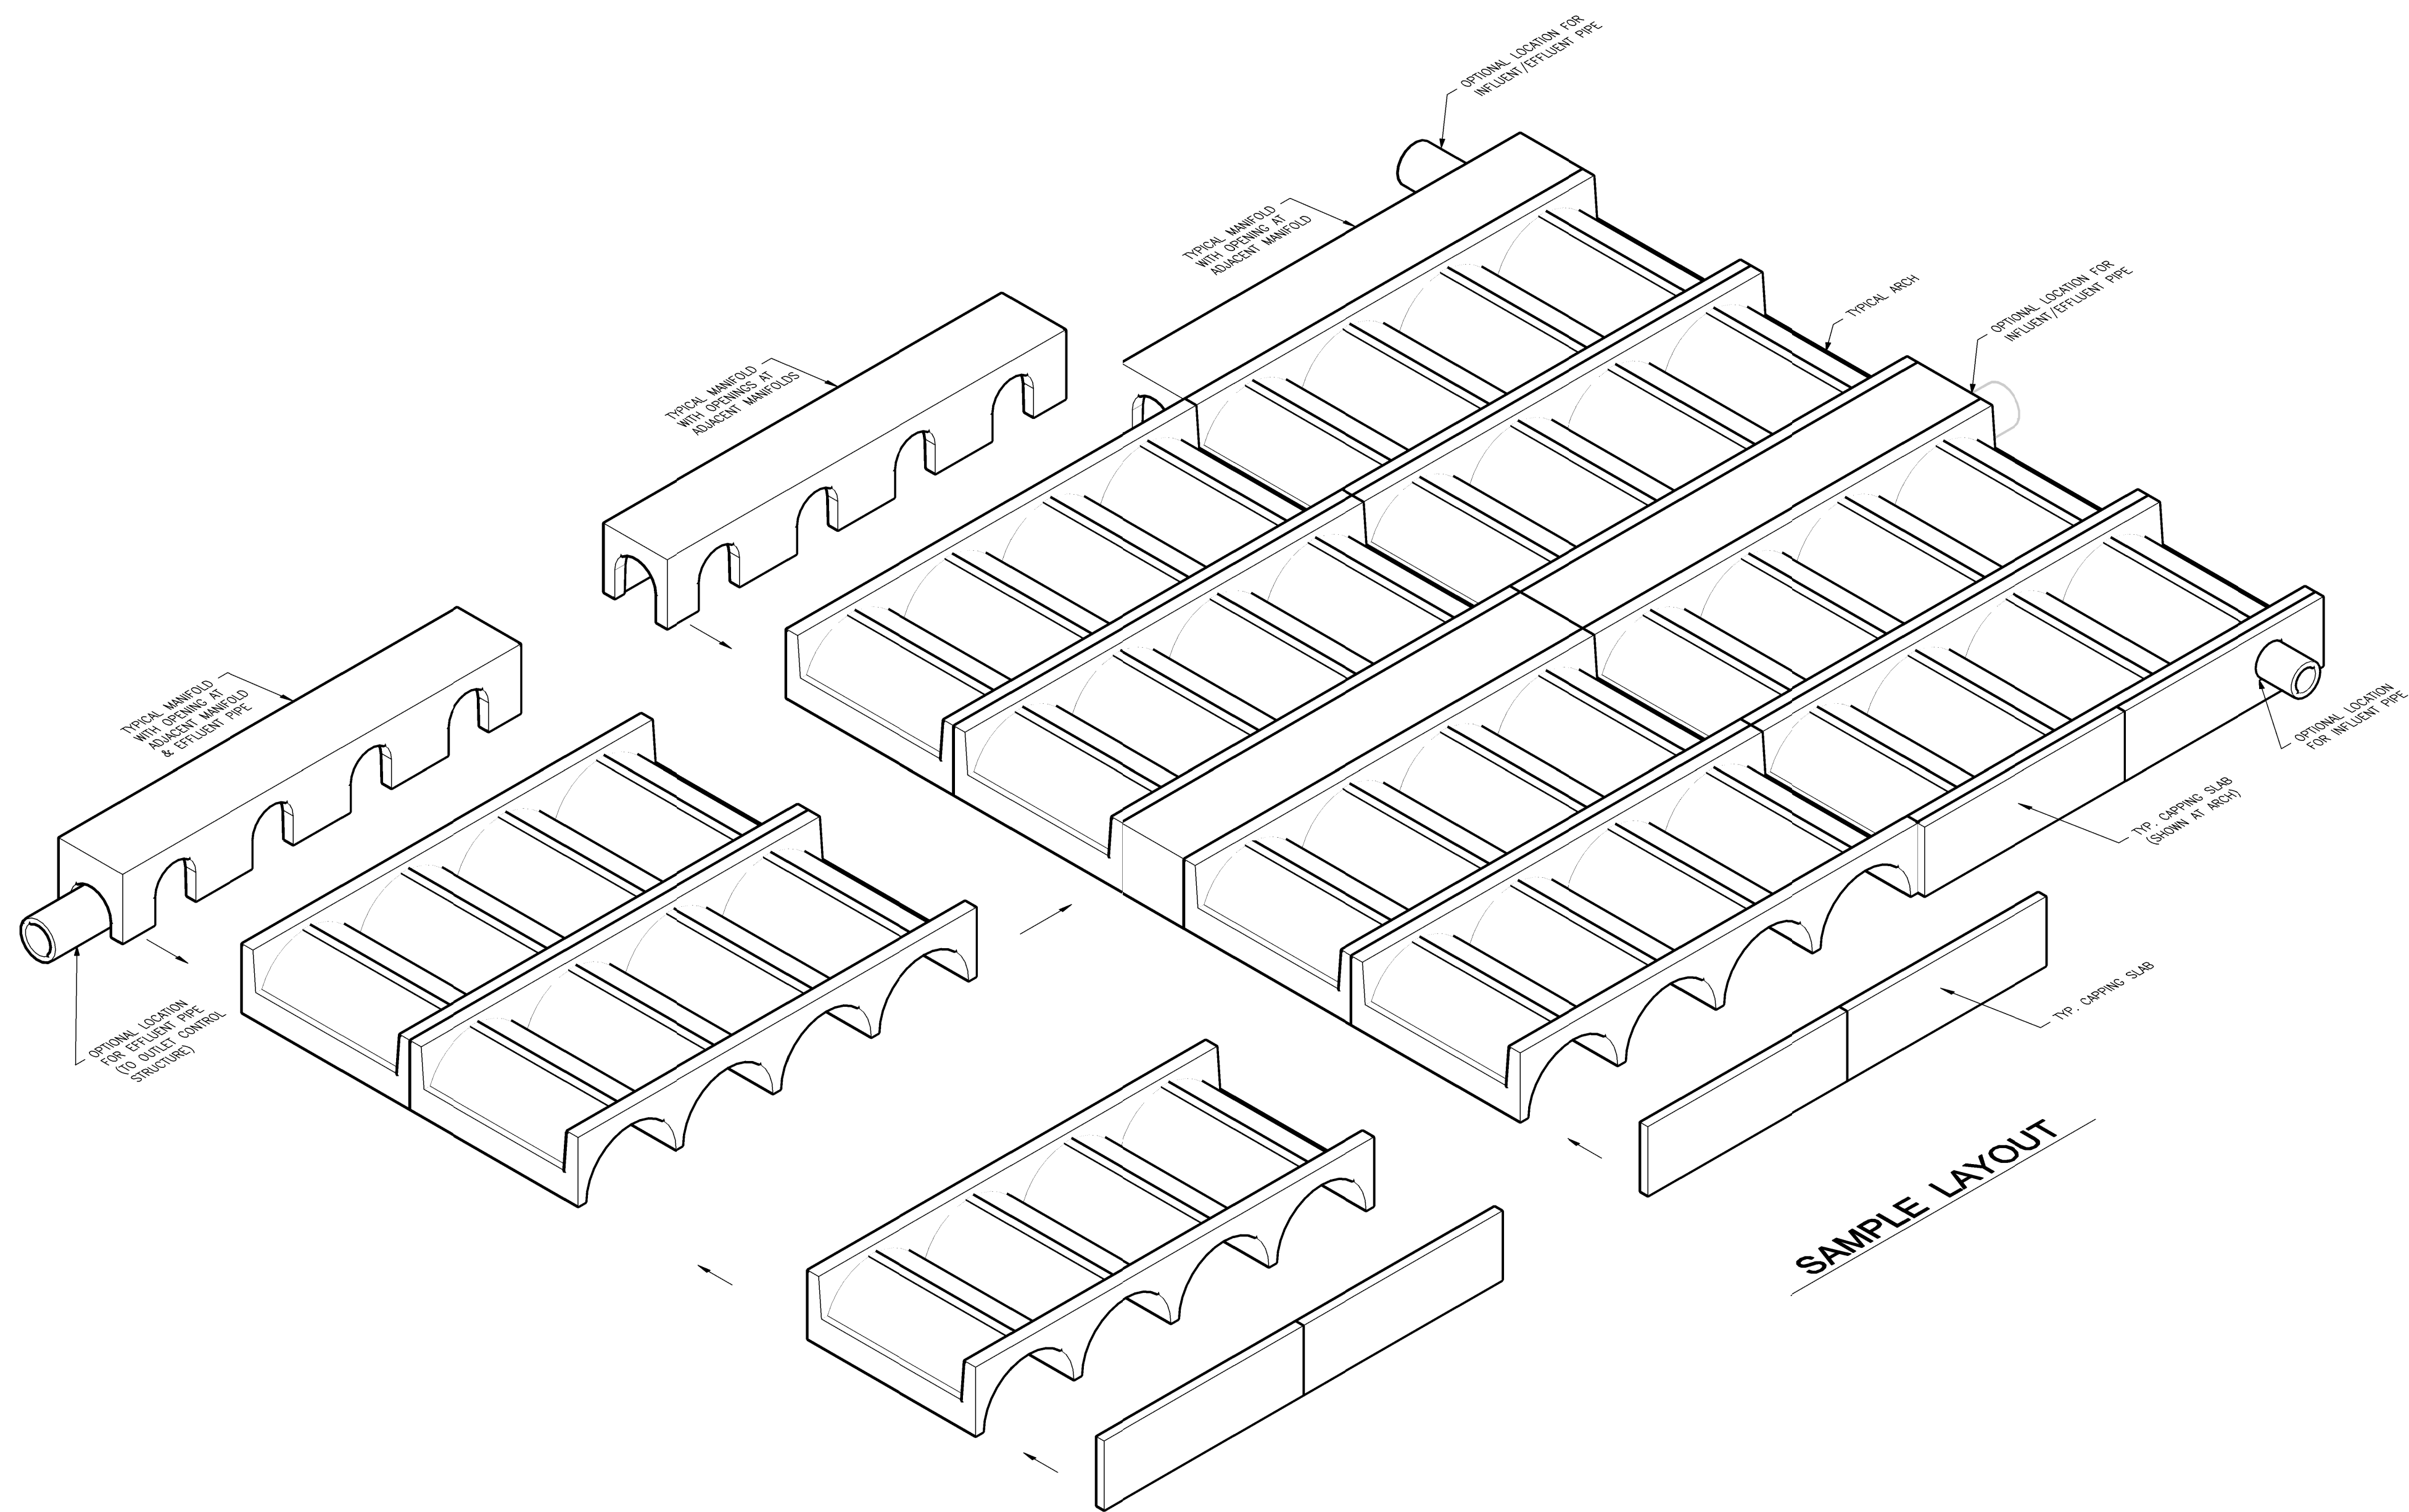

SAMPLE LAYOUT

JOB:			
CONTR:			
ENG'R:			
BY: RLK	CKD:	DATE: 11-11-2024	SHT. 1 OF 1